


PICO121

AMD G-Series Embedded SoC Pico ITX SBC with VGA/LVDS, LAN & Audio

NEW

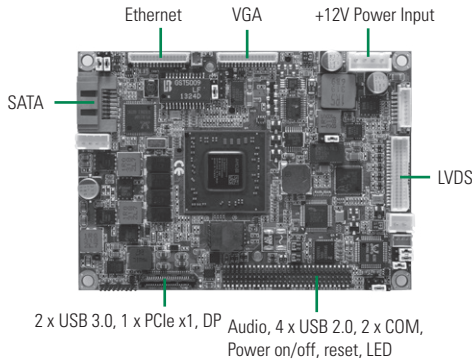

System

CPU	AMD G-Series Embedded SoC GX-210JA 1.0 GHz dual core onboard
System Memory	1 x 204-pin DDR3/3L 1066/1333 SO-DIMM max. up to 8 GB
Chipset	N/A
BIOS	AMI
SSD	N/A
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x Full-Size Mini PCI Express Mini Card with mSATA supported 1 x Half-Size Mini PCI Express Mini Card 1 x PCIe x1, 1 x DP, 2 x USB 3.0 (through expansion connector)
Battery Lithium	Lithium 3V/220mAH
Power Input	1 x 4-pin connector +12V DC-in only AT Auto Power On function supported
Power Requirements	AMD G-Series Embedded SoC GX-210JA @1.0GHz 8 GB DDR3 Max. RMS: +12V @ 0.8A
Size	100 x 72 mm
Board Thickness	1.6 mm
Temperature	-20°C ~ +70°C (-4°F ~ 158°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	1 x RS-232/422/485 1 x RS-232
SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	1 port as 10/100/1000 Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111DP
Audio	HD Codec audio as MIC-in/Line-out with Realtek ALC662
USB	4 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	N/A

Display


Chipset	AMD G-Series Embedded SoC integrated Gfx graphic engine GX-210JA - Radeon™ HD8180
Memory Size	Share System memory
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single/dual channel

Features


- AMD G-Series Embedded SoC GX-210JA (1.0 GHz)
- 1 DDR3/3L SO-DIMM supports up to 8 GB memory capacity
- 4 USB 2.0 ports, 2 COM ports
- Supports half-size PCIe Mini Card and full-size PCIe Mini Card w/ mSATA
- DASH supported

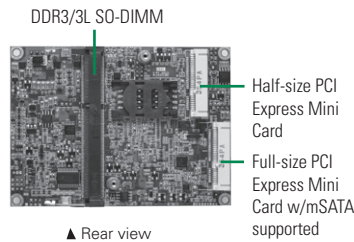

▲ Rear view



▲ AX93278



▲ AX93277



▲ Assembly view

Packing List

Standard

Quick installation guide, User's Manual/Utility CD and accessories

Accessories

Part Number	Description
85932771000E	AX93277 I/O board
59403208000E	SATA cable
594P8800600E	SATA power cable
5078H121010E	Heatspreader
5078H100200E	Heatsink

Ordering Information

Standard

PICO121VGA-GX210JA	AMD G-Series Embedded SoC GX-210JA 1.0 GHz Pico-ITX SBC with VGA/LVDS, 10/100/1000Mbps, audio
(P/N: E38H121101)	

Optional

I/O board	RS-232/422/485	RS-232	USB 2.0	USB 3.0	Display	2nd LAN
AX93278 (P/N: E393278100)	1	1	2	2	HDMI	Yes

SBC Services and Solutions

Systems on Modules

Embedded SBCs >EPIC

Embedded SBCs >3.5" Capa

Embedded SBCs >Nano-ITX

Embedded SBCs >Pico-ITX

Embedded SBCs >PC/104

Industrial Motherboards

Slot CPU Cards

Accessories

Appendix

* All specifications and photos are subject to change without notice.
© 2014 Axiomtek Co., Ltd. All rights reserved.