

I(P)GS-6416XSFP

16 10/100/1000T (PoE at/af) + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch w/ Enhanced G.8032 Ring, PXE, 24V/24TV/48V/HV/WV input models

- Auto-sensing triple speed 1G/2.5G/10G SFP+ Uplink Cage
- PoE model: Support IEEE802.3af/af up to 30W per port PoE management incl. Detection and Scheduling
- Support PXE to verify switch firmware with the latest or certain version on server
- Enhanced G.8032 ring protection < 20ms for single ring. Supports enhanced mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8 MSTI /RSTP ; support MRP ring
- Miss-wiring avoidance & node failure protection
- User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values***; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82; Port based DHCP distribution, Mac based DHCP server, DHCP Snooping, SSH v2/SSL, HTTPS, INGRESS ACL L2/L3, TACACS+, subnet VLAN and protocol VLAN
- At dual Input voltage 9~36VDC (24V model); 16.8~56VDC (24TV model); 44~56VDC (48V model); 16.8~137.5VDC (WV model); Single input power 90~305VAC/120~430VDC (HV model)
- Enhanced Environmental Monitoring for temp., actual input voltage, current & total power load
- Optional L3Lite/L3* to be upgradable
- Wide range operation temperature (-E model):-40~75C/-40~167F; Fan-less design
- EN50155/61373/50121-4/50121-3-2 verification
- E-marking certificate for vehicle application (24V model)



OVERVIEW

Lantech I(P)GS-6416XSFP is a high performance L2+ (All Gigabit) Ethernet switch with 16 100/1000T + 4 1G/2.5G/10G auto sensing SFP+ (w/16 PoE 802.3af/at Ports) which provides advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring. The QoS, advanced security including INGRESS ACL L2/L3, TACACS+, SSH v2/SSL and subnet VLAN, protocol VLAN and Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port are supported and also required in large network. It also supports 10K Jumbo frames.

Up to 16 PoE at/af ports w/advanced PoE management

(PoE model)

Compliant with 802.3af/at standard, the Lantech IPGS-6416XSFP being able to feed each PoE port up to 30 Watt. Lantech IPGS-6416XSFP supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

Miss-wiring avoidance, Loop protection, node failure protection

The I(P)GS-6416XSFP also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech I(P)GS-6416XSFP being able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

Support PXE to verify switch firmware with the latest or certain version

The switch can check its firmware version during booting time via PXE protocol. If switch finds any newer version, it will upload automatically.

Optional L3Lite/L3 to be upgradable

Lantech OS3 is optional upgradable to L3 Lite for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter-VLAN routing.

Enhanced Storm control

Storm control prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces and the detection is more precise and reaction is more efficient.

DHCP option 82 & Port based, Mac based DHCP, Option66, DHCP Snooping, IPv6 DHCP server

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. For the ending device, which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Basic IPv6 DHCP service can be supported.

User friendly GUI, Auto topology drawing

The user-friendly UI, innovative auto topology drawing and topology demo makes I(P)GS-6416XSFP much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

Enhanced G.8032 ring, 8 MSTI MSTP; MRP ring

Lantech I(P)GS-6416XSFP features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows RSTP over VLAN for redundant links with 8 MSTI.

MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance application.

802.1X security by MAC address

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

Editable configuration file; USB port for upload/download configuration

The configuration file of Lantech I(P)GS-6416XSFP can be exported and edited with word processor for the following switches to configure with ease.

The USB port can upload/download the configuration from/to USB dongle.

Event log & message; 2DI / 2DO

In case of event, the I(P)GS-6416XSFP is able to send an email to pre-defined addresses as well as SNMP Traps out immediately. It provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

Enhanced environmental monitoring for switch inside information

The enhanced environmental monitoring can detect switch overall temperature, total PoE load, voltage and current where can send the SNMP traps, email when abnormal.

Dual power 24V/24TV/48V input, high PoE budget

The Lantech I(P)GS-6416XSFP is designed with dual power supply at 44~56VDC (48V model), 9~36VDC (24V model) or 16.8~56VDC input (24TV model). The 48V model can have 240W PoE budget while 24V model can have 80W (12V input) or 120W (24V input) budget.

24V/24TV/HV/WV input voltage selection

The Lantech I(P)GS-6416XSFP is able to work at dual 9~36VDC (24V model), 16.8~56VDC (24TV model) or 16.8~137.5VDC (WV model). Or with single high power supply at 90~305VAC / 120~430VDC (HV model).

E-marking certificate

The E-marking certificate (24V model) makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 24V but has demand of IP surveillance or VoIP applications.

Industrial hardened design with high EFT and ESD protection


Lantech I(P)GS-6416XSFP features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory applications. The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

FEATURES & BENEFITS


- **16 100/1000T + 4 1G/2.5G/10G auto sensing SFP+ (w/16 PoE 802.3af/at ports) (Total 20 Ports Switch)**
- **PoE model: Embedded 16 PoE IEEE802.3af/at function to feed power up to 30W for active mode operation**
- **PoE model: 48V input for PoE budget 240W; 24V input for PoE budget 80W/ 24V input for PoE budget 120W**
- **PoE model: PoE management including PoE detection and scheduling for PD (power devices)**
- **Back-plane (Switching Fabric): 112Gbps**
- **16K MAC address table**
- **DDM to support SFP diagnostic function*****
 - *Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance*
- **10KB Jumbo frame**
- **User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting**
- **Enhanced G.8032 Ring protection in 20ms for single ring**
 - *Support various ring/chain topologies, including enhanced ring & basic ring*
 - *Enhanced G.8032 ring configuration with ease*
 - *Cover multicast and data packets protection*
- **Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy with 8 MSTI**
- **4K 802.1Q VLAN, Port based VLAN, GVRP**
- **Supports IEEE 802.1ab LLDP, Cisco GDP; LLDP info can be viewed via Web/ Console**
- **Support PXE to verify switch firmware with the latest or certain version**
- **DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; DHCP Snooping, Port based DHCP server; Basic DHCP Option 66**
- **Mac based DHCP server to assign IP address that includes dumb switches in DHCP network**
- **Bandwidth Control**
 - *Ingress packet filter and egress rate limit*
 - *Broadcast/multicast packet filter control*
- **Miss-wiring avoidance**
 - *LED indicator*
- **Node failure protection**
 - *Ensure the switches in a ring to survive after power breakout is back*
 - *The status can be shown in NMS when each switch is back*
- **TFTP/HTTP firmware upgrade**
- **System Event Log, SMTP** Email alert and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
 - *SSL/SSH v2/INGRESS ACL L2/L3*
 - *MAC address table: MAC address entries/Filter/static MAC-Port binding*
 - *Remote Admin: IP address security management to prevent unauthorized intruder.*
 - *TACACS+*
 - *Login Security: IEEE802.1X/RADIUS*
 - *HTTPS for secure access to the web interface*
- **Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **IGMP router port for Multicast protection**
- **IGMPv1, v2, v3 with Query mode for multimedia; GMRP**
- **Dual image firmware support**
- **MLD Snooping for IPv6 Multicast stream**
- **Factory reset button to restore setting to factory default**
- **Watchdog design to auto reboot switch when CPU is found dead**
- **Enhanced environmental monitoring for system actual input voltage, current, ambient temperature, and total power load**
- **Supports DIDO (Digital Input/Digital Output)**
- **Configuration backup and restoration**
 - *Supports editable configuration file for system quick installation*
 - *USB port to upload/download firmware by USB dongle*
- **Wide operation temperature (-E model): -40C~70C/-40F~158F; Fan-less design**
- **Enhanced Storm control**
- **Diagnostic including Ping / ARP table / DDM information**
- **Optional L3lite/L3* to be upgradable**
- **E-marking certificate for vehicle application (24V model)**
- **Dual DC input 9~36VDC (24V model); 16.8~56VDC (24TV model); 44~56VDC (48V model); 16.8~137.5VDC (WV model); HV single input from 90~305VAC/120~430VDC (HV model)**
- **IP30 metal housing with DIN rail and Wall-mount** design**

DIMENSIONS (unit=mm)


IPGS-6416XSFP, 48V model

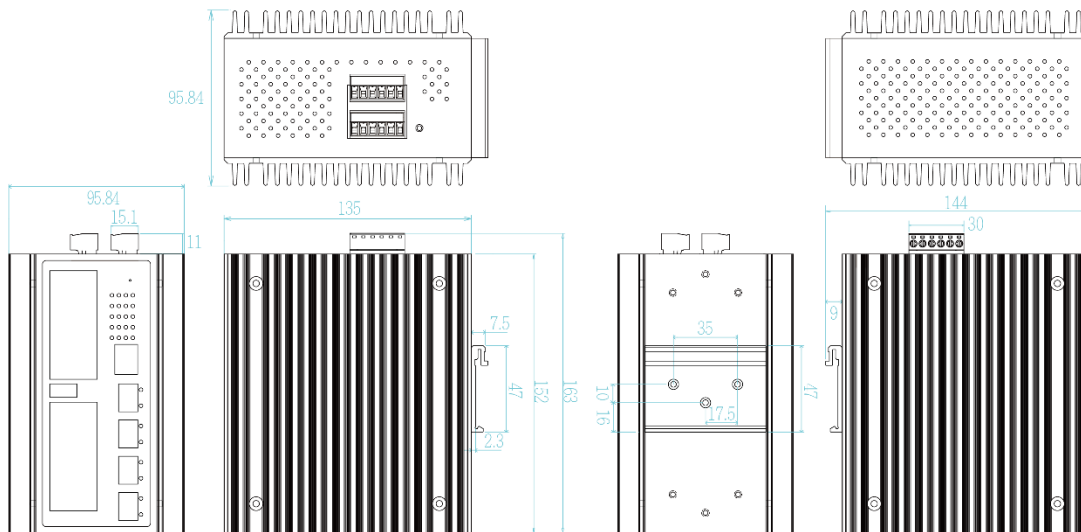


IPGS-6416XSFP, 24V/24TV model

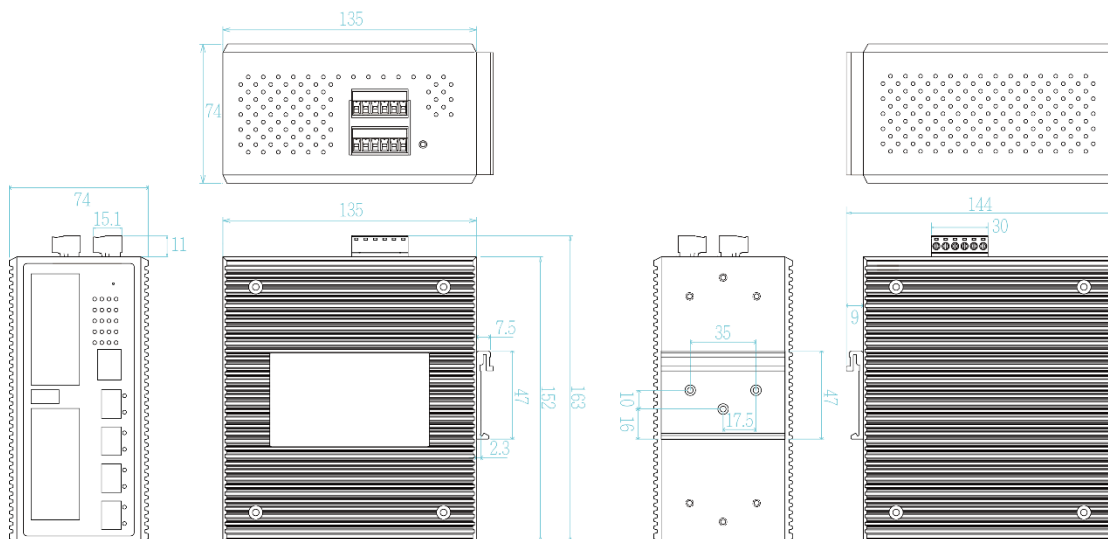

IGS-6416XSFP, 24V/24TV model

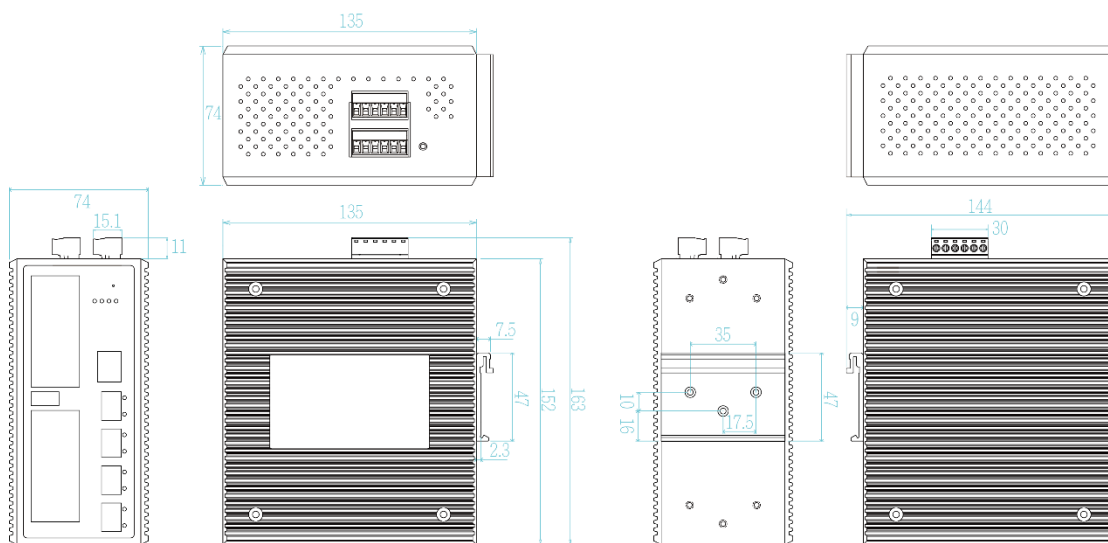

IGS-6416XSFP, HV/WV model

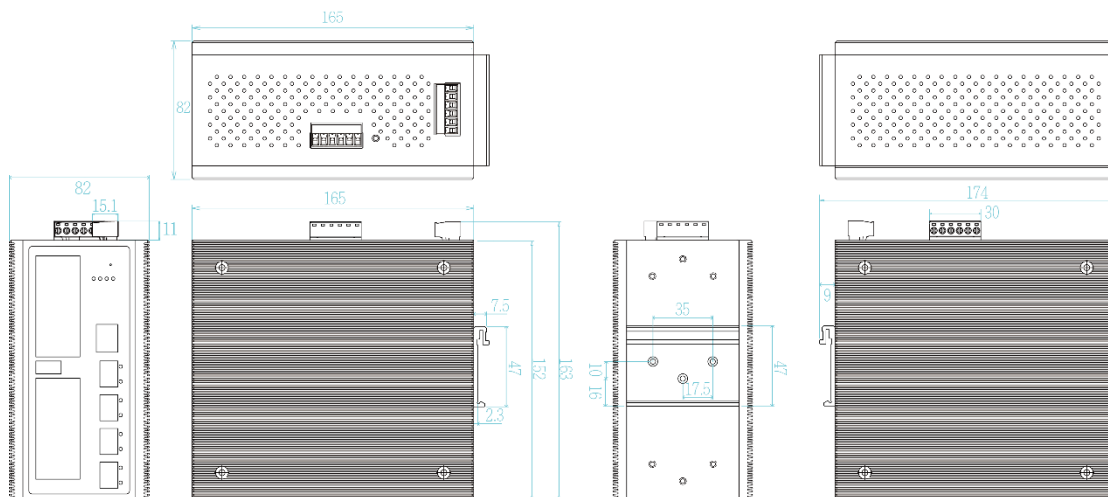

SPECIFICATION

Hardware Specification

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet
Switch Architecture	Back-plane (Switching Fabric): 112Gbps
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100/1000T: 16 x ports RJ-45 with Auto MDI/MDI-X function

	Mini-GBIC: 4 x 1G/2.5G/10G SFP+ auto-sensing socket with DDMI RS-232 connector: RJ-45 type USB x 1 Power connector: 1 x 6-pole terminal block DIDO: 1 x 6-pole terminal block
Network Cable	100Base-TX: 2-pair STP Cat. 5/ 5E/ 6 cable; EIA/TIA-568 100-ohm (100m) 1000Base-T: 4-pair STP Cat5E/6 cable; 10GBaseT:4-pair STP Cat6/6A/7 cable
Optical Cable	1Gbps: Multi-mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 km, 1310 nm (50/125 μm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μm) 2.5Gbps Multi-mode: 0 to 300 m, 850 nm (50/125 μm); Single mode: 0 to 2 km/ 15 km/ 40 km, 1310 nm (9/125 μm); 0 to 40 km/ 80 km/ 100km, 1550 nm (9/125 μm) WDM 1Gbps: Single-mode: 0 to 10 km/ 20 km/ 40 km/ 60 km,

	<p>1310 nm (9/125 μm); 0 to 80 km, 1490 nm (9/125 μm); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μm)</p> <p>WDM 2.5Gbps</p> <p>Single-mode: 0 to 5 km/ 20 km/ 40 km/ 60 km, 1310 /1550nm (9/125 μm); 0 to 80 km, 1490/1550 nm (9/125 μm)</p> <p>10Gbps</p> <p>Multi-mode: 0 to 300 m, 850 nm (OM3 50/125 μm);</p> <p>Single mode: 0 to 10 km/ 20 km, 1310 nm (9/125 μm); 0 to 40 km/ 80km/ 100 km, 1550 nm (9/125 μm)</p> <p>WDM 10Gbps</p> <p>Single-mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1270/1330 nm (9/125 μm); 0 to 80km, 1490/1550 nm (9/125 μm)</p>
LED	<p>Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green)</p> <p>Ethernet port: Link/Activity (Green), Speed (Green); 10G (Amber)</p> <p>PoE: Link/Act (Green, PoE model); Mini-GBIC: Link/Activity (Green)</p>
DI/DO	<p>2 Digital Input (DI):</p> <p>Level 0: -30~2V / Level 1: 10~30V</p> <p>Max. input current:8mA</p> <p>2 Digital Output (DO): Open collector to 40 VDC, 200mA</p>
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model)
Storage Temperature	-40°C~75°C / -40°F~167°F(-E model)
Power Supply	<p>IPGS-6416XSFP</p> <p>Dual DC input, 44~56VDC(48V model);</p> <p>Dual DC input, 9~36VDC (24V model)</p> <p>Dual DC input, 16.8~56VDC (24TV model)</p> <p>IGS-6416XSFP</p> <p>Dual DC input, 9~36VDC (24V model);</p> <p>Dual DC input, 16.8~56VDC (24TV model)</p> <p>Dual DC input, 16.8~137.5VDC (WV model)</p> <p>Single HV input, 90~305VAC/120~430VDC (HV model)</p>
PoE Budget (PoE model)	<p>240W for 44~56V input (48V model)</p> <p>(54V input is recommended for PTZ or heater applications)</p> <p>80W at 12V input; 120W at 24V input (24V model)</p> <p>Higher PoE budget can be applied upon request.</p> <p>**</p>
PoE pin assignment (PoE model)	<p>RJ-45 port # 1~#16 support IEEE 802.3at/af End-point, Alternative A mode.</p> <p>Positive (VCC+): RJ-45 pin 1,2</p> <p>Negative (VCC-): RJ-45 pin 3,6</p>
Power Consumption	Max. 27W (full load w/o PoE)
Case Dimension	<p>Metal case. IP-30,</p> <p>95.84 (W) x 135 (D) x 152 (H) mm (48V model)</p> <p>74 (W) x 135 (D) x 152 (H) mm (24V and 24TV model)</p> <p>74 (W) x 165 (D) x 152 (H) mm (HV and WV model)</p>
Weight	<p>1400g (IGS-6416XSFP, 24V/24TV model)</p> <p>1400g (IPGS-6416XSFP, 24V/24TV model)</p> <p>1800g (IPGS-6416XSFP, 48V model)</p>
Installation	DIN Rail and Wall Mount** Design
EMI & EMS	<p>FCC Class A,</p> <p>CE EN55032 Class A, CE EN55024,</p> <p>CE EN61000-4-2, CE EN61000-4-3,</p> <p>CE EN61000-4-4, CE EN61000-4-5,</p> <p>CE EN61000-4-6, CE EN61000-4-8,</p> <p>CE EN61000-6-2</p>
Safety	EN IEC 62368-1
Stability Testing	<p>IEC60068-2-32 (Free fall),</p> <p>IEC60068-2-27 (Shock),</p> <p>IEC60068-2-6 (Vibration)</p>
Railway compliance	<p>EN50155:2017, EN50121-3-2:2015,</p> <p>EN50121-4:2015, EN61373:2010</p>

MTBF	586,082.5 Hrs. (IEC 62380 standards)
Vehicle certificate	E13 marking (24V model)
Warranty	5 years
Software Specification	
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI
SNMP MIB	<p>RFC 1213 MIBII</p> <p>RFC 1158 MIB</p> <p>RFC 1157 SNMP MIB</p> <p>RFC 1493 Bridge MIB*</p> <p>RFC 1573 IF MIB</p> <p>RFC 2674 Q-Bridge MIB*</p> <p>RFC 2819 RMON MIB</p> <p>Private MIB</p>
ITU G.8032	<p>Support ITU G.8032 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode)</p> <p>Support basic single ring & enhanced ring</p> <p>Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection</p>
PoE Management (PoE model)	PoE Detection to check if PD hangs then restart the PD
Per Port PoE Status (PoE model)	PoE scheduling
User friendly UI	<ul style="list-style-type: none"> ■ Auto topology drawing ■ Topology demo ■ Complete CLI for professional setting
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN
CDP	Cisco Discovery Protocol for topology mapping
Enhanced Environmental Monitoring	System status for actual input voltage, current, total power load and ambient temperature to be shown in GUI and sent alerting if any abnormal status
VLAN	<p>Port Based VLAN</p> <p>IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.)</p> <p>GVRP</p> <p>Protocol based VLAN, Subnet based VLAN</p>
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
Remote Admin	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.
Logjn Security	Supports IEEE802.1X Authentication/RADIUS
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Network Security	<p>Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.</p> <p>802.1X access control for port based and MAC based authentication/static MAC-Port binding</p> <p>Ingress ACL L2/L3</p> <p>SSL/ SSH v2 for Management</p> <p>HTTPS for secure access to the web interface</p> <p>TACACS+ for Authentication</p>
IGMP	Support IGMP snooping v1, v2, v3; 256 multicast groups; IGMP router port; IGMP query; GMRP
MLD Snooping	Support IPv6 Multicast stream
Static multicast forwarding	<p>Static multicast forwarding forward reversed</p> <p>IGMP flow with multicast packets binding with ports for IP surveillance application</p>
Bandwidth	Support ingress packet filter and egress packet

Control	<p>limit.</p> <p>The egress rate control supports all of packet type.</p> <p>Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet.</p> <p>The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.</p>	Enhanced Storm Control	prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex	DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82 (Client & Server)/Port based DHCP; DHCP Option 66; DHCP Snooping, Basic IPv6 DHCP server
System Log	Supports System log record and remote system log server	Mac based DHCP Server	Assign IP address by Mac that can include dumb switch in DHCP network
SMTP** Trap	Supports SMTP** Server and 8 e-mail accounts for receiving event alert	Optional L3Lite/L3*	Lantech OS3 is optional upgradable to L3 Lite/L3* for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter-VLAN routing.
Protection	<ul style="list-style-type: none"> ■ Miss-wiring avoidance ■ Node failure protection ■ Loop protection 	DNS	Provide DNS client feature and support Primary and Secondary DNS server.
SNMP Trap	<p>Up to 5 trap stations; trap types including:</p> <ul style="list-style-type: none"> ● Device cold start ● Authorization failure ● Port link up/link down ● DI/DO open/close ● Typology change (ITU ring) ● Power failure ● Environmental abnormal 	SNTP	Supports SNTP to synchronize system clock in Internet
PXE	PXE to verify switch firmware with the latest or certain version	Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
		Configuration upload and download	Supports text configuration file for system quick installation; Support factory reset button to restore all settings back to factory default; USB for auto restore/backup
		Diagnostic	Support Ping, ARP table and DDM information
		Dual Image Firmware	Support dual image firmware function

*Future release

**Optional

***Optional DDM SFP required

ORDERING INFORMATION

- **IPGS-6416XSFP-16-48V.....P/N: 8350-864**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 44~56VDC input PoE budget 240W
- **IPGS-6416XSFP-16-48V-E.....P/N: 8350-865**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 44~56VDC input PoE budget 240W
- **IPGS-6416XSFP-16-24V.....P/N: 8350-8662**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 9~36V input, PoE budget 80W at 12V, 120W at 24V
- **IPGS-6416XSFP-16-24V-E.....P/N: 8350-8663**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 9~36V input, PoE budget 80W at 12V, 120W at 24V
- **IPGS-6416XSFP-16-24TV.....P/N: 8350-86621**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 16.8~56V input, PoE budget 80W at 12V, 120W at 24V
- **IPGS-6416XSFP-16-24TV-E.....P/N: 8350-86631**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 16.8~56V input, PoE budget 80W at 12V, 120W at 24V
- **IGS-6416XSFP-24V.....P/N: 8350-8681**
16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 9~36V input
- **IGS-6416XSFP-24V-E.....P/N: 8350-8691**
16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 9~36V input
- **IGS-6416XSFP-24TV.....P/N: 8350-86811**
16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 16.8~56V input
- **IGS-6416XSFP-24TV-E.....P/N: 8350-86911**
16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 16.8~56V input
- **IGS-6416XSFP-HV.....P/N: 8350-870**
16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; Single high power 90~305VAC/120~430VDC
- **IGS-6416XSFP-HV-E.....P/N: 8350-871**
16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; Single high power 90~305VAC/120~430VDC
- **IGS-6416XSFP-WV.....P/N: 8350-8701**

16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual input 16.8VDC~137.5VDC

■ **IGS-6416XSFP-WV-E.....P/N: 8350-8711**

16 10/100/1000T + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual input 16.8VDC~137.5VDC

OPTIONAL ACCESSORIES

Software package

■ **OS3 – L3L..... P/N: 9000-114**

OS3 software platform with Layer 3 Lite functions (please check Lantech software data sheet for details)

■ **OS3 – L3*..... P/N: 9000-116**

OS3 software platform with Layer 3 functions (please check Lantech software data sheet for details)

DIN Rail Power for 802.3at Applications

- **NDR-240 series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

Mini GBIC (SFP)

■ 8330-162-V1	MINI GBIC 1000SX (LC/0.5km) Transceiver	■ 8330-263D-V1	MINI GBIC 2.5G 1310nm FP (LC/2km) Transceiver
■ 8330-163-V1	MINI GBIC 1000SX2 (LC/2km) Transceiver	■ 8330-265D-V1	MINI GBIC 2.5G 1310nm DFB (LC/15km) Transceiver
■ 8330-165-V1	MINI GBIC 1000LX (LC/10km) Transceiver	■ 8330-193D-V1	10G Base SFP+ SR, Multi-mode (LC/300m) Transceiver
■ 8340-0591-V1	MINI GBIC 1000LHX (LC/40km) Transceiver	■ 8330-194D-V1	10G Base SFP+ LR, Single-mode (LC/10km) Transceiver
■ 8330-166-V1	MINI GBIC 1000XD (LC/50km) Transceiver	■ 8330-209D-V1	10G Base SFP+ , Single-mode(10km) Transceiver (WDM 1270)
■ 8330-169-V1	MINI GBIC 1000XD (LC/60km) Transceiver	■ 8330-210D-V1	10G Base SFP+ , Single-mode(10km) Transceiver (WDM 1330)
■ 8330-167-V1	MINI GBIC 1000ZX (LC/80km) Transceiver	■ 8330-200D-V1	10G Base SFP+ , Single-mode(20km) Transceiver (WDM 1270)
■ 8330-170-V1	MINI GBIC 1000EZ (120km) Transceiver	■ 8330-201D-V1	10G Base SFP+ , Single-mode(20km) Transceiver (WDM 1330)
■ 8330-168-V1	MINI GBIC 1000T (100m) Transceiver	■ 8330-202D-V1	10G Base SFP+ , Single-mode(40km) Transceiver (WDM 1270)
■ 8330-188-V1	LTSFP-1000BX-10KM Transceiver (WDM 1310)	■ 8330-203D-V1	10G Base SFP+ , Single-mode(40km) Transceiver (WDM 1330)
■ 8330-189-V1	LTSFP-1000BX-10KM Transceiver (WDM 1550)	■ 8330-206-V1	10G/5G/2.5G/1000Base-T SFP, 3.3V,30m (10G) 50m (2.5G/5G) 100m (1G); -10~70°C (only used from 18V~56VDC power input, maximum two ports)
■ 8330-186-V1	LTSFP-1000BX-20KM Transceiver (WDM 1310)		
■ 8330-187-V1	LTSFP-1000BX-20KM Transceiver (WDM 1550)		
■ 8330-180-V1	LTSFP-1000BX-40KM Transceiver (WDM 1310)		
■ 8330-182-V1	LTSFP-1000BX-40KM Transceiver (WDM 1550)		
■ 8330-181-V1	LTSFP-1000BX-60KM Transceiver (WDM 1310)		
■ 8330-183-V1	LTSFP-1000BX-60KM Transceiver (WDM 1550)		
■ 8330-184-V1	LTSFP-1000BX-80KM Transceiver (WDM 1490)		
■ 8330-185-V1	LTSFP-1000BX-80KM Transceiver (WDM 1550)		
■ 8330-262D-V1	MINI GBIC 2.5G 850nm VCSEL (LC/0.3km) Transceiver		

All SFPs ended with D are with Diagnostic function

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.