


Half-size PCI-Express Mini Card Connector (CN3)

This is a 52-pin connector for PCI-Express Mini Card interface which is via PCIe link only.

Pin	Signal	Pin	Signal
1	WAKE#	2	+3.3VSB
3	No use	4	GND
5	No use	6	+1.5V
7	CLKREQ#	8	No use
9	GND	10	No use
11	REFCLK-	12	No use
13	REFCLK+	14	No use
15	GND	16	No use
17	No use	18	GND
19	No use	20	W_DISABLE#
21	GND	22	PERST#
23	PE_RXN	24	+3.3VSB
25	PE_RXP	26	GND
27	GND	28	+1.5V
29	GND	30	SMB_CLK
31	PE_TXN	32	SMB_DATA
33	PE_TXP	34	GND
35	GND	36	No use
37	GND	38	No use
39	+3.3VSB	40	GND
41	+3.3VSB	42	No use
43	GND	44	No use
45	No use	46	No use
47	No use	48	+1.5V
49	No use	50	GND
51	No use	52	+3.3VSB



AX92906 Quick Installation Guide


Checklist

- ✓ AX92906 board x1
- ✓ Quick installation guide x1
- ✓ Product driver CD x1
- ✓ Screw x2
- ✓ COM port cable x2


Note: Please contact your local vendors if any damaged or missing items. **DO NOT** apply power to the board if there is any damaged component.

Install driver for your operating system before using the AX92906.

Dimension and Fixing Holes

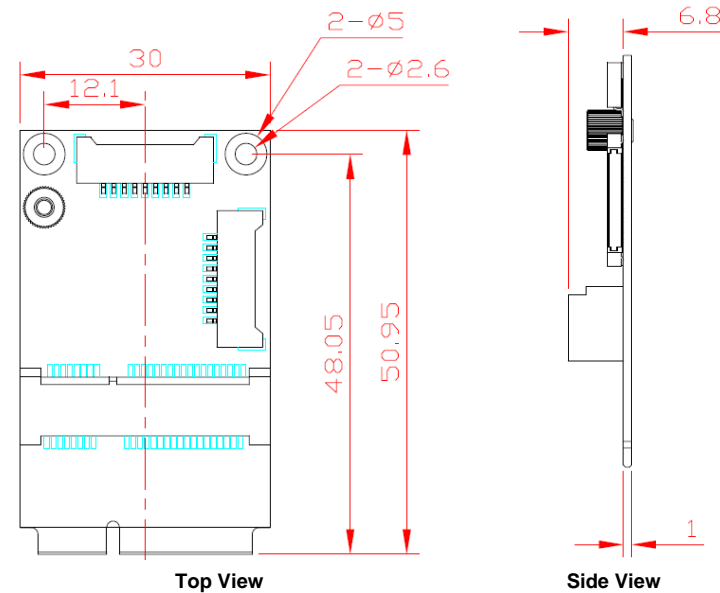


Module Layout

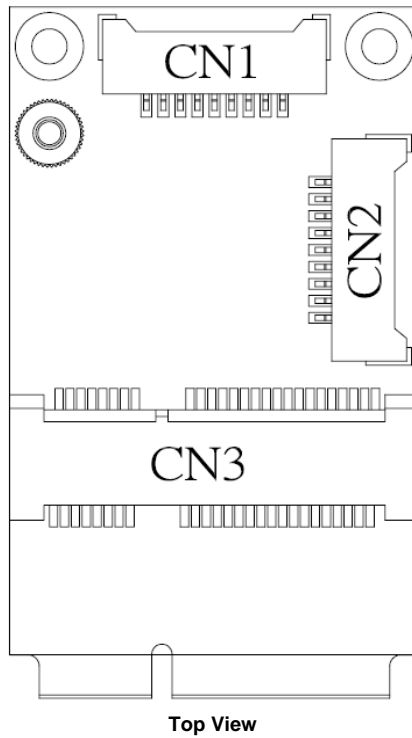

COM Connectors (CN1 and CN2)

These are 1x9-pin wafer connectors which are compliant with Molex 53780 for COM port interface.

Pin	Signal
1	DCD
2	DSR
3	RXD
4	RTS
5	TXD
6	CTS
7	DTR
8	RI
9	GND



Connectors

Connector	Description
CN1	COM1 Connector
CN2	COM2 Connector
CN3	Half-size PCI-Express Mini Card Connector