


# AX92322

## 2-port/4-port GigE PCI Express Card

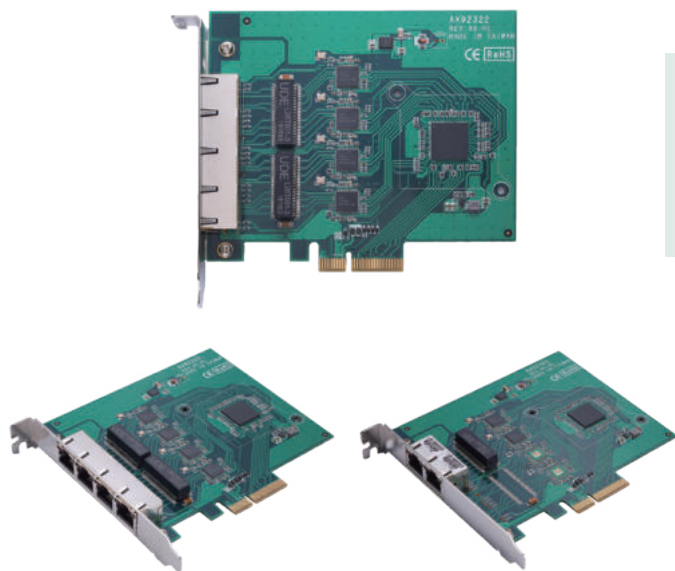

▲ Side view

### Features

- 2 or 4 independent Intel® Ethernet Controller i210-AT
- Supports 9.5KB Jumbo Frame and IEEE 1588
- Supports two or four GbE LAN ports
- PCI Express x4 interface
- Operating temperature from 0°C to 70°C

### Specifications

GigE	
Host Bus	4-lane Gen2 PCIe interface, compliant with PCI Express base specification, revision 2.0
Channels	2/4 ports
Ethernet Chip	2 or 4 x Intel® Ethernet Controller i210-AT Supports 9.5KB Jumbo Frame and IEEE 1588
Data Transfer Rate	10/100/1000 Mbps
General Specifications	
Bus Type	PCI Express x4
Power Consumption	Power from PCIe slot 1.73A@+3.3V max.
Dimensions	125 x 111 mm
I/O Connector	RJ-45
Operating temperature	0°C to +70°C (+32°F to +158°F)
Storage temperature	-20°C to +80°C (-4°F to +176°F)
Operating Humidity	10- 95% RH, non-condensing
OS	Windows® 7/10 (32/64-bit), Linux
Certification	CE

### Ordering Information

AX92322-2GbE (P/N: E392322103)	2-port GigE PCI Express card
AX92322-4GbE (P/N: E392322102)	4-port GigE PCI Express card