


# ECM500 NEW

Embedded Chassis for Mini-ITX SBC

## Features

- Designed for low power Mini-ITX SBC
- One 2.5" SSD/HDD supported
- Supports one PCI Express card slot
- Side cooling holes enhance the ventilation effect
- Three D-Sub connectors at the rear side

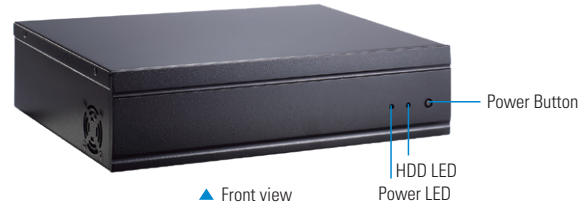

## Specifications

Standard Color	Black	
Construction	Heavy-duty cold-rolled steel	
Indicator	1 x Green LED for system power-on 1 x Red LED HDD Active	
Panel I/O	Front	1 x Power button
	Rear	1 x Standard Mini-ITX I/O bracket space 3 x D-Sub connector 1 x PCI Express card slot
Expansion Interface	N/A	
Storage	1 x 2.5" HDD	
Dimensions	217.2 mm (8.55") (D) x 300 mm (11.81") (W) x 74 mm (2.91") (H)	
Environment	EMI pre-scan meets EN55032 Class A	

## Applications

Embedded PC controller  
Compact industrial PC  
POS  
Digital Signage

## Ordering Information

<b>Standard</b>	
ECM500	Embedded MicroBox for low power Mini-ITX SBC (P/N: E272500101)
<b>SBC Options</b>	
MANO842/MANO300/MANO500/MANO520/MANO540/MANO560	
<b>Power Supply Options</b>	
50916624000E	Flex ATX 250W FSP250-50FGBBIM w/cable
50954724200E	ATX_AUTO 300W FSP300-57FCB L:750mm
**NOTE: MANO540/MANO560 requires a PSU of 300W or more	

## Dimensions

MODEL : ECM500

