


NA346B NEW

Fanless Ultra Compact Network Appliance with Intel® Celeron® Processor N3350 and up to 4 LAN for uCPE, VPN, and Security Gateway

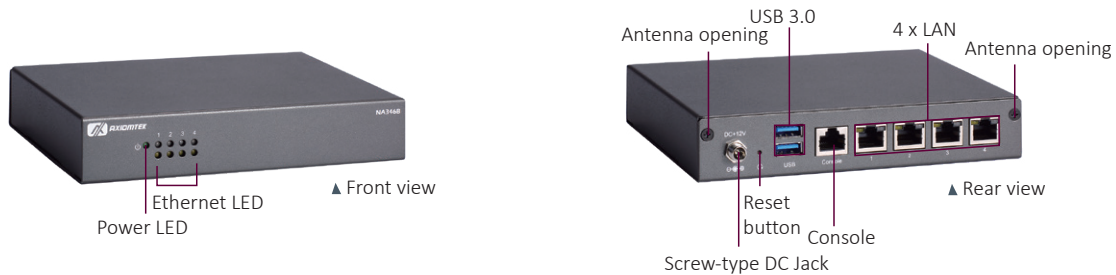

Features

- Intel® Celeron® processor N3350
- 1 DDR3L-1600 SO-DIMM for up to 8GB of memory
- 4 GbE RJ-45 LAN ports (Realtek RTL8111H)
- 1 PCIe Mini Card slot for mSATA
- One 8GB eMMC Flash (SanDisk)
- Supports TPM 2.0 onboard
- Small form factor with fanless and noiseless design
- Suitable for uCPE, VPN and IoT security gateway applications

Specifications

System

CPU	Intel® Celeron® processor N3350 (Apollo Lake)
Chipset	SoC integrated
Memory	1 x DDR3L-1600 SO-DIMM, up to 8GB
BIOS	AMI SPI Flash BIOS
Storage	1 x 8GB eMMC Flash onboard (SanDisk) 1 x Full-size mSATA (SATA + USB signal)
Network Interface	4 x GbE RJ-45 (Realtek RTL8111H)
I/O	1 x Console (RJ-type) 2 x USB 3.0 4 x GbE RJ-45 1 x Reset button 1 x DC Jack (screw-type)
TPM	Onboard TPM 2.0
Expansion Interface	1 x Full-size PCIe Mini Card slot with Nano SIM (USB signal) 1 x Nano SIM Socket
Power Supply	1 x DC power adapter 12V/3A
OS Compatibility	Linux

Specifications

Mechanical/ Environmental

Form Factor	Desktop, small form factor and fanless
LED	Power and Link/Act with transfer rate
Operating Temperature	0°C to +40°C (+32°F to +104°F)
Humidity	10% to 95% RH, non-condensing
Chassis Material	Steel
Dimensions (H x W x D)	31 x 166 x 118.2 mm (1.22" x 6.54" x 4.65")
Weight (net/gross)	0.284 kg (0.63 lb)/0.786 kg (1.73 lb)
Certifications	CE/FCC Class B

Ordering Information

Standard

NA346B-N3350-A (P/N: E26E346B00)	Fanless ultra compact network appliance with Intel® Celeron® N3350 processor (2C 1.10 GHz 6W), eMMC, 4 LAN, TPM 2.0, without LAN Bypass (LBP)
-------------------------------------	---

Optional

5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco
59906000010E	Power cord YP-12/YC-12 (JP)
59903000000E	Power cord YP-22/YC-12 (EU)
59905000000E	Power cord YP-35/YC-12 (AU)
59904010000E	Power cord YP-61A/YC-12 (UK)

* Specifications and certifications may vary depending on specific requirements.

Packing List

1 x DC power adapter 12V/5A
1 x Power Cord- US
4 x Rubber feet
Screws for mini card

Dimensions

