



NA350C

Desktop Network Appliance Platform with Intel Atom® Processor x6425E and up to 7 LAN for VPN, 5G Edge Gateway, Firewall, and UTM

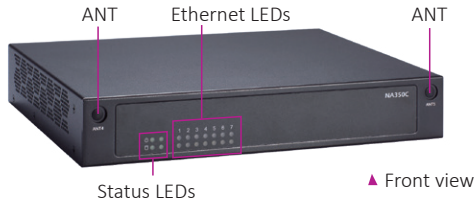

With 5 RJ-45 LAN & 2 SFP ports

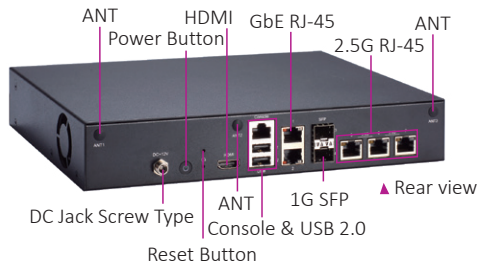

Features

- Intel Atom® x6425E processor
- 2 DDR4 SO-DIMM for up to 32GB of memory
- Two 1G SFP and 2 GbE RJ-45 LAN ports (Intel® I350)
- Three 2.5G RJ-45 LAN ports (MaxLinear GPY211)
- 1 M.2 Key B slot for 5G NR/LTE
- 1 M.2 Key E slot for Wi-Fi
- 1 full-size PCI Express Mini Card slot for LTE
- 1 half-size PCI Express Mini Card slot for Wi-Fi
- Supports 2 SIM sockets



With 7 RJ-45 LAN ports



Specifications

System

CPU	Intel Atom® x6425E processor (Elkhart Lake)
Chipset	SoC integrated
Memory	2 x DDR4-3200 non-ECC SO-DIMM, up to 32GB
BIOS	AMI
Storage	1 x M.2 Key M 2242 slot (SATA) 1 x 2.5" SATA3 HDD
Network Interface	4 x GbE RJ-45 LAN or 2 x GbE RJ-45 LAN + 2 x 1G SFP by SKU (Intel® I350) 3 x 2.5G RJ-45 LAN (MaxLinear GPY211)
I/O	1 x Console (RJ-type) 7 x RJ-45 (or 5 x RJ-45 + 2 x SFP by SKU) 2 x USB 2.0 1 x HDMI 1 x Reset button 1 x DC Jack (screw type) 1 x Power button with LED
TPM	Onboard TPM 2.0
Other Features	LAN Bypass (1 pair)
Expansion Interface	1 x M.2 Key M 2242 slot (SATA3) 1 x Half-size PCI Express Mini Card slot (PCIe + USB 2.0) 1 x Full-size PCI Express Mini Card slot with Nano SIM socket (USB 2.0) 1 x M.2 Key B 3052/3042 slot with Nano SIM socket (USB 2.0 + USB 3.0) 1 x M.2 Key E 2230 slot (USB 2.0 by default; PCIe optional)
LCM Module	N/A
Power Supply	1 x DC power adapter 12V/5A
OS Support	Linux

Specifications

Mechanical/ Environmental

Form Factor	1U desktop
LED	Power, HDD, GPIO programmable, LAN Bypass, Link/Act with transfer rate
Operating Temperature	0°C to +40°C (+32°F to +104°F)
Humidity	10% to 95% RH, non-condensing
Chassis Material	Steel
Dimensions	44 x 257 x 197 mm (1.73" x 10.12" x 7.76")
Weight (net/gross)	1.598 kg (3.52 lb)/2.45 kg (5.4 lb)
Certifications	CE/FCC Class A

Ordering Information

Standard

NA350C-x6425E-A (P/N: E26E350C00)	1U desktop with Intel Atom® x6425E processor (4C 2.00GHz 12W), 4 GbE RJ-45 LAN, three 2.5G RJ-45 supporting 1 LBP, and TPM 2.0
NA350C-x6425E-B (P/N: E26E350C01)	1U desktop with Intel Atom® x6425E processor (4C 2.00GHz 12W), 2 GbE RJ-45 LAN, two 1G SFP, three 2.5G RJ-45 LAN supporting 1 LBP, and TPM 2.0

Optional

5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco
59906000010E	Power cord YP-12/YC-12 (JP)
59903000000E	Power cord YP-22/YC-12 (EU)
59905000000E	Power cord YP-35/YC-12 (AU)
59904010000E	Power cord YP-61A/YC-12 (UK)
826E350C020E	NA350C Rackmount kit semi-finished


* Specifications and certifications may vary based on different requirements.

Packing List

- 1 x DC power adapter 12V/5A
- 1 x Power cord- US
- 1 x SATA cable
- 1 x SATA power cable
- 4 x Rubber feet
- Screws for 2.5" SSD, M.2 and mini card

Dimensions

With 7 RJ-45 LAN ports

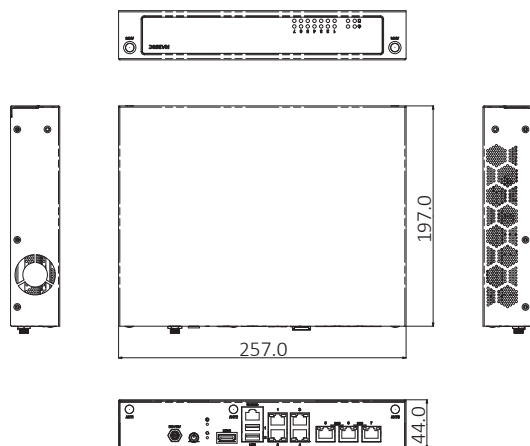

With 5 RJ-45 LAN & 2 SFP ports

